This document must not be copied without our written permission, and the contents thereof must not be imparted to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.


Following standards apply for this drawing:
SS-EN ISO 8015
SS-EN ISO 4288 AD-TS0062
see entire drawing for additional standards

ISO 2768mK
AD-TS0061
(valid if stated on drawing):

Basic size (mm)	Dev. (mm)
-6	±0.1
(6)-30	±0.2
(30)-120	±0.3
(120)-400	±0.5
(400)-1000	±0.8

Ext. radius, chamfer (mm)	Dev. (mm)
-0.5	±0.1
(0.5)-3	±0.2
(3)-6	±0.5
(6)-	±1

Angular short length (mm)	Dev. (°)
-1	±3°
(1)-10	±1°
(10)-50	±0°30'
(50)-120	±0°20'
(120)-400	±0°10'
(400)-	±0°5'

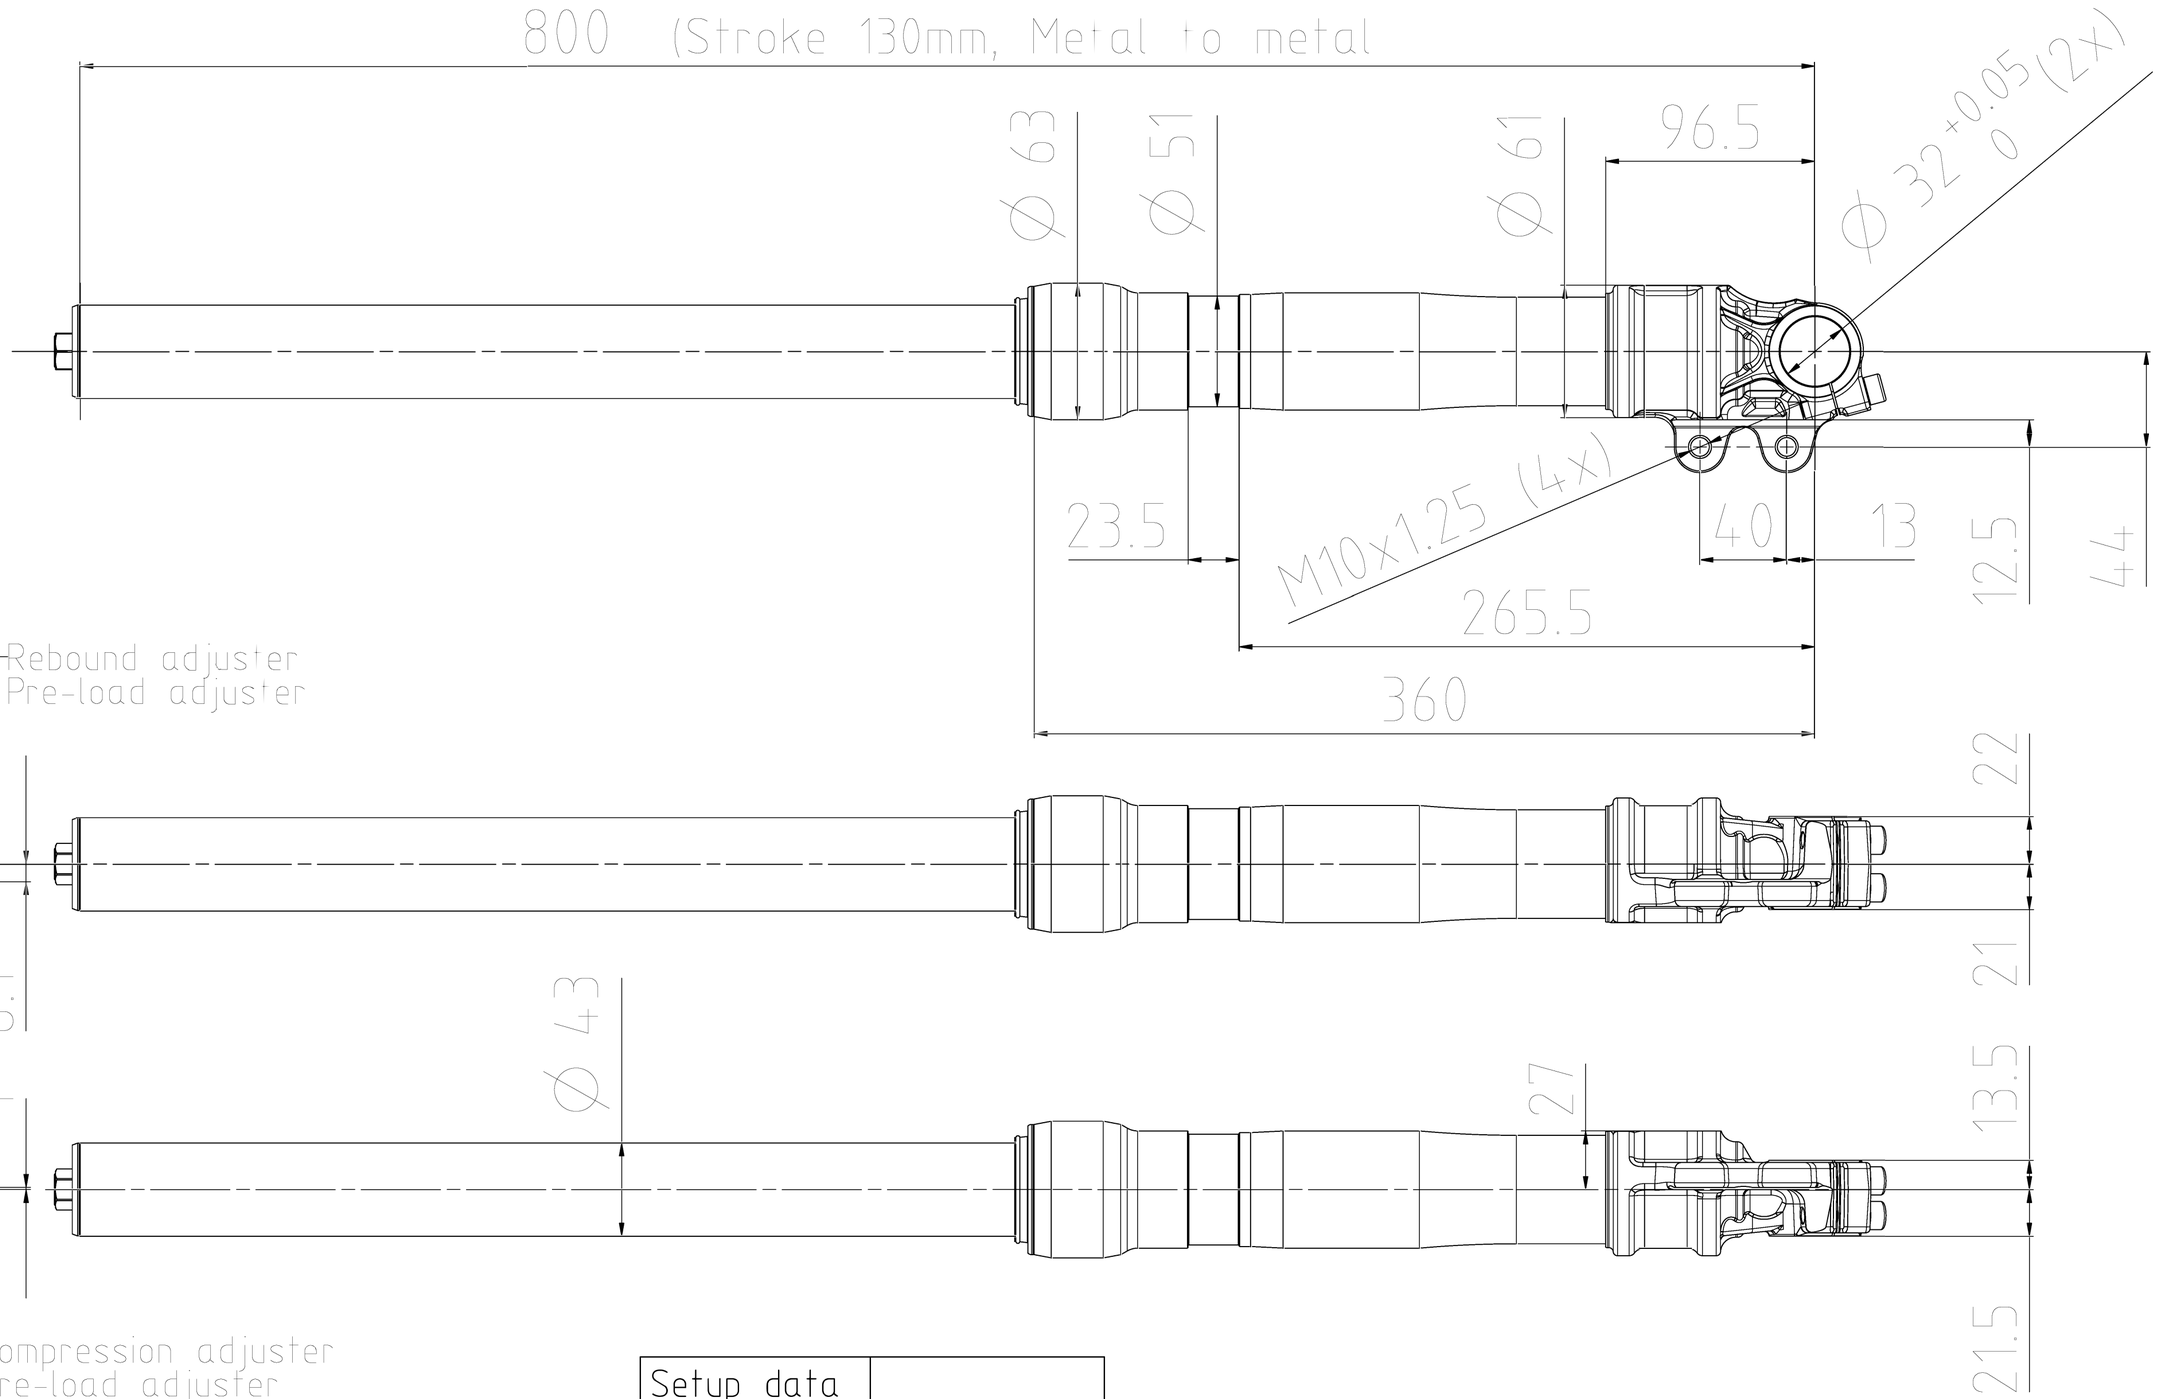

Setup data	
Compression	15 clicks out
Rebound	15 clicks out
Spring pre-load	11 mm
Spring rate	9.5 N/mm
Oil level	210 mm

Rev.	Type of change	Sign.	Date	Rev.no
A	Drawing released for production	HELE	161128	

Material	Heat treatment	Surface treatment

Date	Drawn	Approved	Format	Scale	Compare
2016-11-28	HELE	TAN	A2	1:2	

Designation (swedish)

Designation (english)
Retro 43 RWU Gold/Black

Drawing number
FG-631

Revision
A