

Kit Contents

Description	Part No	Pcs
Top cap assembly		2
Washer 10/18/0.5	63118-08	4
Spacer	10317-01	2
Spring 26/442/5	10315-50	2
Spring 26/442/6	10315-60	2
Sticker ÖHLINS	01185-01	2
Sticker ÖHLINS	01185-04	2
Sticker ÖHLINS	00192-01	2

Note!

Please note that this image is a general representation of the product and may differ slightly from your product.

Note!

Before installing this product, check the contents of the kit. If anything is missing, please contact an Öhlins dealer.

Warning!

Öhlins cannot be held responsible for any personal injury or damage that may occur after installing the Öhlins spring kit. We strongly recommend to let an Öhlins authorized service center to install this kit.

Warning!

After you have installed this product, taken a test ride at low speed to make sure that you vehicle has maintained stability.

Note!

Please note that during storage and transportation, especially at high ambient temperature, some of the oil and grease used for assembling may leak and stain the packaging. This is in no way detrimental to the product, wipe off the excessive oil/grease with a cloth.

Warning!

Before installing this product, read the Öhlins Owner's Manual. The shock absorber is an important part of your vehicle and will affect the stability.


Front fork set Front Fork Spring Kit Kawa KLE500 Top cap & Spring KIT

FSK 188


Mounting Instructions

ÖHLINS
ADVANCED SUSPENSION TECHNOLOGY

Original Front Fork assembly

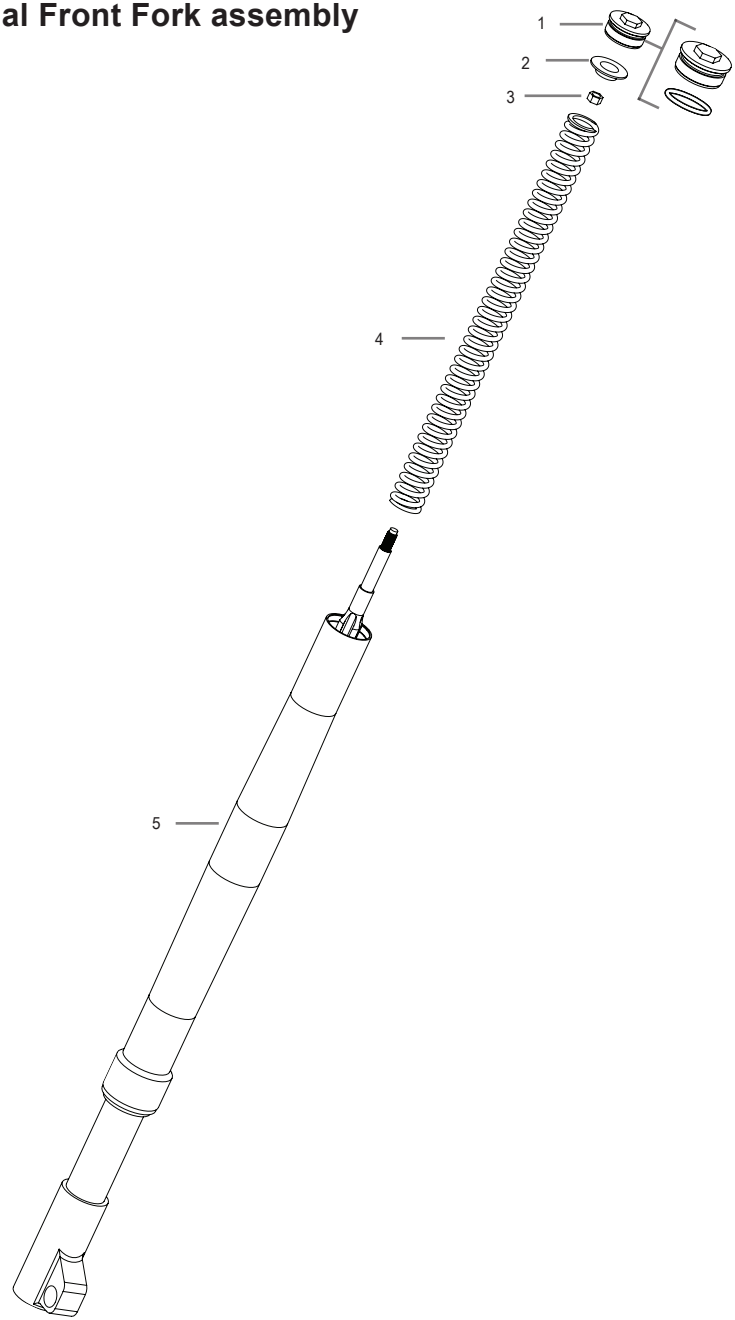

Öhlins Front Fork kit assembly

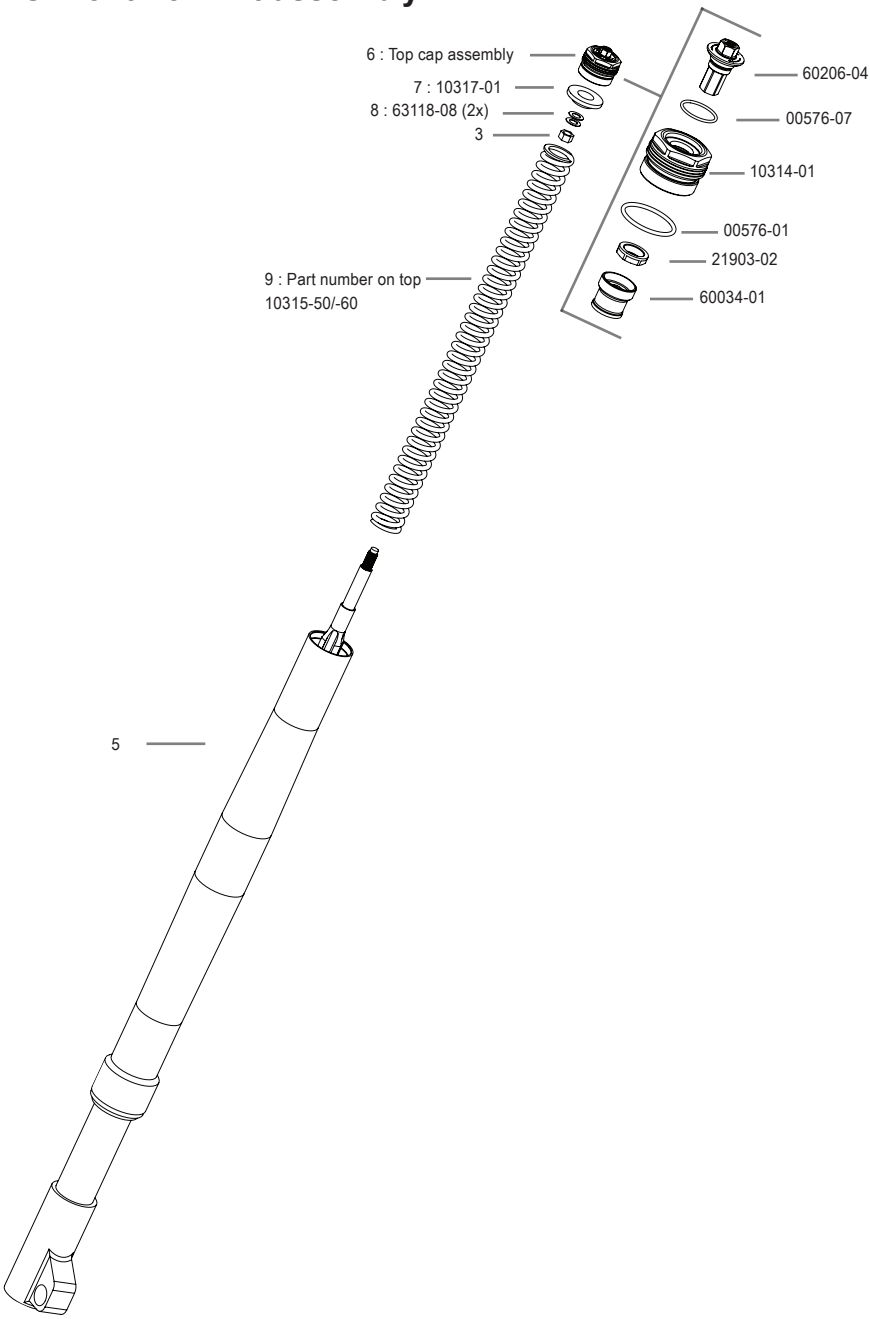

MOUNTING INSTRUCTIONS

Congratulations!

With this purchase you have made a clear statement. This high performance Front Fork spring kit from Öhlins is nothing but pure racing breed which means that you have taken one more step to eliminate luck on your motorcycle.

The balance between your Front Fork and rear suspension will sharpen up and the performance of your Front Fork will improve. 40 years of racing experience is now a crucial part of your riding experience.

Note!

Öhlins FSK 188 gives the possibility to adjust the spring preload 0/+15 mm
> Every complete turn equals 1mm adjustment

Recommended oil

We recommended to use Öhlins high performance Front Fork fluid 01314-01.

Recommended oil level

109 mm

Need to check recommend oil level

Note!

The measurement of oil level is taken from the top of the inner tube (3) to the oil surface.
> The fork leg need to be in vertical position
> The fork need to be fully compressed
> The fork must be without the spring and the preload tube

Note!

During the installation of the fork damping kit, please be sure to don't lose the nut (3).

How to install

1.Put the motorcycle on a work stand so that the front wheel barely touches the ground. Make sure the motorcycle is in a stable position.

2.Release the top tripleclamp screws.

2.1 Loosen (do not remove) both fork top caps ½ turn.

2.2 Remove both the fork legs as per Vehicle Service Manual instructions.

3.Remove the original top cap (1), spacer (2), standard nut (3), and spring (4)

4.Purge all the oil from both fork legs.

5.Fill the Öhlins oil at the recommended oil level.

6.Insert the Öhlins spring (9),Öhlins spacer (7), Öhlins washer (8) 2x and standard nut (3).

7.Install the Öhlins top cap assembly. Tighten the top cap at torque value ~10N/mm.

8.Reinstall both fork legs as per vehicle service manual instructions.

Note!

Öhlins FSK 188 spring 10315-50 rate is 5.0 N/mm
Öhlins FSK 188 spring 10315-60 rate is 6.0 N/mm

	Recommended spring		
Feeling	**Soft**	**Medium**	**Hard**
RH Leg	10315-50	10315-50	10315-60
LH Leg	10315-50	10315-60	10315-60

Öhlins products are subject to continuous improvement and development, therefore, although these instructions include the most up-to-date information available at the time of printing, minor updates may occur.

To find the latest information contact an Öhlins distributor. Please contact Öhlins if you have any questions regarding the contents in this document.

Part no. MI_FSK188_EN_0
Issued 2026-07-30

© Öhlins Asia Co. Ltd. All rights reserved. Any reprinting or unauthorized use without the written permission of Öhlins Racing AB is prohibited.

Öhlins Asia Co. Ltd
700/937 Moo5, Tambol Nongkhaga,
Amphur Phantong, Chonburi Province
20160 Thailand

ÖHLINS
ADVANCED SUSPENSION TECHNOLOGY